

SUNSKY® Corrugated Polycarbonate Skylight and Sidelight Panels







Overview

www.PalramAmericas.com

Main Benefits

- Virtually unbreakable
- Self extinguishing
- High transmission of natural daylight
- Retains optical clarity over time
- Engineered to stay tough over a wide temperature range (-40°F to 250°F)
- Easily and safely installed
- 10 year limited warranty (loss of light due to yellowing; damage due to hail)
- Hail and wind resistant (FBC approved)
- 100% UV protection



Typical Applications

- Skylights for corrugated metal roofs
- Sidelights
- Roofing
- Ridge lights (using SunSky ridge cap)

Looking for reduced glare and less shadows?

Unlike competing products, Ask for SUNSKY SunSky Soft White isn't just white PC with less white tint.



It's advanced technology, proven to provide 100% diffusion and 85% light transmission. Soft White spreads light and reduces harsh shadows and glare.








Stock Profiles and Availability*

Due file News	David Dynéla Dimanaiana	Thicknesses (mm)		Standard Lengths (Ft.)			Colors						
Profile Name	Basic Profile Dimensions		1.0	1.20	8'	10'	10 1/2'	12'	16'	Clear	Soft White	White	Solar Gray
SunSky 9"	3/8" 23/4" 3/8" 9" 1/8"	*	*		*	*		*	*	*	*	*	*
SunSky 12"	1-1/4	*	*		*	*		*	*	*	*	*	
SunSky Ridge Caps	Bend as required 1,255° 4,00° 23° Width Sunsky Ridge Cap Sunsky Ridge Cap Sunsky Ridge Cap		★a	★b			*			*	*	*	

Common Specialty Profiles* (Minimal stock available on hand, most subject to minimum order requirements. Other profiles available.)

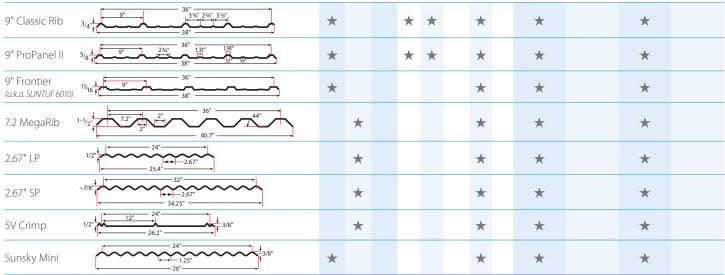

^{*} Special dimensions and colors are available, subject to minimum order.

Available Colors and Light Transmission

Color	Light Transmission	Color	Light Transmission		
Clear	90%	White Opal	45%		
Soft White	85%	Solar Gray	35%		

Need to Match your own Custom Profile?

Palram can match virtually any metal profile in just a few short weeks, and with minimal order requirements. Talk to your Palram rep or call Palram.



Load Performance

SunSky had no mechanical failures or cracks at the end of any test to measure ultimate load when tested to ICBO Evaluation Service Acceptance Criteria, AC 16 Plastic Skylights.

Available exclusively from Palram:

SunSky for Higher Loads & Wider Purlin Spans

1mm and 1.5mm thick SunSky for applications that require better loading capabilities, FBC Approval, or for greater spans between purlins. Contact Palram.



Regulatory Code Compliance Certification

Organization	Standard	Classification			
Florida Building Code	2010 Code (SunSky 12 in 1mm or 1.5mm required)	• FL11238 Roof Deck • FL11240 Structural Wall Applications			
Miami Dade County	FBC 2010 (Approved Material)	NOA# 12-0110.04			
City of Los Angeles	LABC 2014 (Light Transmitting Plastics)	RR 25298			
ICC (International Code Council)	IBC 2012 (Light Transmitting Plastics)	ESR-1893			
TDI (Texas Dept. of Insurance)	IBC 2012	RWA-04			

Authorized Di



PALRAM AMERICAS

9735 Commerce Circle Kutztown, PA, 19530 USA Tel: 800.999.9459 palramamericas@palram.com



the









Form 501

In as much as PALRAM Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the materials suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any PALRAM Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. PALRAM Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local PALRAM Industries supplier to ensure that you have obtained the most up to date information.

TEXAS DEPARTMENT OF INSURANCE
FULL HATTON RIVA-04 ENGINEERING